


# Tudor Roof Tile Co. Limited

Located on the Romney Marsh in Kent

Using traditional production skills, our clay roof tiles offer a link with the past.

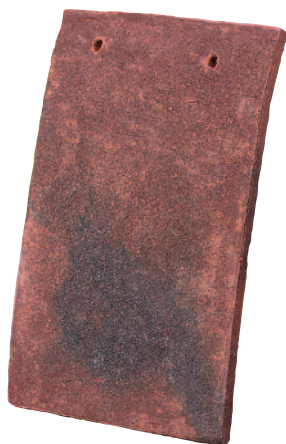

**Jubilee**

Our range of handmade Plain (nibbed) tiles exhibit a larger degree of double camber and capture the character and much sought after aesthetic qualities of older reclaimed tiles.

Our range of handmade Peg (no nib) tiles are flatter, but with a slight camber to match in with existing Peg tiles found on many listed and conservation area properties.

Our Jubilee colour is achieved by applying two colours of Kent sourced sand. When fired, this produces a more weathered, random Brown & Black tone. When used with other colours, it gives more of an instant aged appearance to a roof.

## Technical Specifications

| DIMENSIONS<br>(variable to avoid straight lines on roof) | (metric (mm))                       | (Imperial (inches))          | DIMENSIONS<br>(variable to avoid straight lines on roof)   | (metric (mm))       | (Imperial (inches))                           |
|--|-------------------------------------|------------------------------|--|---------------------|---|
| <b>Plain Tiles</b> (nibbed)                              | 265 x 165                           | 10.5 x 6.5                   | <b>Transverse Strength</b>   | 780 newtons         |   |
| <b>Plain Peg Tiles</b>                                   | 255 x 160                           | 10 x 6                       | <b>Ventilation Tiles / Systems</b>   |                     | Area  |
| <b>Ornamentals</b>                                       | 265 x 165                           | 10.5 x 6.5                   | Half Round Vented Ridge (eyebrow)  |                     | 2580mm <sup>2</sup> / 4 inches <sup>2</sup>   |
| <b>Oast Tapers</b> (Two Tapers, Wide & Narrow)           | 255 x 150 reducing to 120mm or 85mm |                              | Hog's Back Vented Ridge (eyebrow)  |                     | 2580mm <sup>2</sup> / 4 inches <sup>2</sup>   |
| <b>Fittings</b>  |                                     |                              | Invisible Under Tile Vent System   |                     | 9000mm <sup>2</sup> / 14 inches <sup>2</sup>  |
| Ridges - all types                                       | 300 Long                            | 12 Long                      | In-Tile Vent System  |                     | 6000mm <sup>2</sup> / 9.3 inches <sup>2</sup> |
| External & Internal Angles (90 degree)                   | 265 Long                            | 10.5 Long                    | <b>Packaging</b>   |                     |   |
| <b>Lap</b> (minimum)                                     |                                     |                              | Plain & Peg Tiles are banded in tens for ease of handling on site and shrink wrapped on non returnable pallets of 1000 |                     |   |
| Plain Tile & Peg Tile                                    | 65                                  | 2.5                          | <b>Weight</b>  |                     |   |
| <b>Gauge</b> (maximum)                                   |                                     |                              | per 1000 Tiles -   | 1.25 Tonnes average | <b>E &amp; O.E</b>                            |
| Plain Tile   | 100                                 | 4                            |  |                     |   |
| Plain Peg  | 95                                  | 3.75                         |  |                     |   |
| <b>Roof Pitch</b>  |                                     |                              |  |                     |   |
| BS5534:2014 Recommended Minimum -                        | 40°                                 |                              |  |                     |   |
| <b>Covering Capacity</b>                                 |                                     |                              |  |                     |   |
| Plain Tile   | 60 Tiles / metre <sup>2</sup>       |                              |  |                     |   |
| Plain Peg Tile   | 66 Tiles / metre <sup>2</sup>       |                              |  |                     |   |
| <b>Laid Weight</b> (Average)                             |                                     |                              |  |                     |   |
| Plain Tile   | 75kg / metre <sup>2</sup>           | 15.36lbs / feet <sup>2</sup> |  |                     |   |
| Peg Tile   | 75.9kg / metre <sup>2</sup>         | 15.55lbs / feet <sup>2</sup> |  |                     |   |

**Handmade in England**

**Telephone: 01797 320202**

**www.tudorrooftiles.co.uk**

**E-mail:  
info@tudorrooftiles.co.uk**

**Dengemarsh Road, Lydd, Kent  
TN29 9JH**

